

PM1060 PM1120

6 / 12 Ch Analogue Desktop Paging Mic

PAGING MICROPHONES



PM1060

6 Ch Desktop Analogue Paging Microphone



PM1120


12 Ch Desktop Analogue Paging Microphone

PM1060 & PM1120 had been serving the need of paging for decades faithfully. They are available in 6 and 12 zone versions with built in chime, catering the need of small and simple applications. They can be plugged directly into MA series of mixing amplifiers for announcement with zone selection.



- **6 or 12** zone selection
- Pre and post announcement 4 tone **chime**
- **Condenser** gooseneck microphone with illuminated ring
- Adjustable chime and mic **volume** with balance mic / line output level
- **Output level selection** to mic or line signal to suit the input type of the preamplifier mixer

Application Schematic

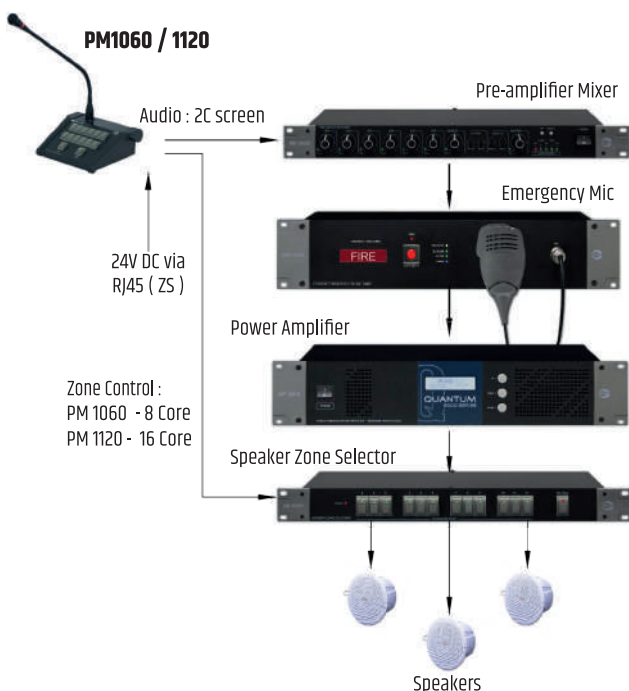

Technical Specifications

Power requirement	24V DC via RJ45
Power consumption	150 mA
Zone selection	6 and 12 zones w ALL CALL
Microphone	Condenser microphone cardioid
Output impedance	600 Ohm
Output level	1.2 V (line output) / balanced mic (50 mV)
Output controls	Chime and mic level
Audio connection	1/4 " stereo phone jack
Switching connection	RJ45
Operating distance	300 m (max)
Chime	4 tone up and 4 tone down
Indicators	Mic ring, zone switch, ALL CALL
Frequency response	100 ~ 12 KHz @ 1 KHz +/- 3 dB; 0 dB out
S/N ratio	> 60 dB
Gooseneck mic length	370 mm
Dimensions (W x H x D)	150 x 62 x 186 mm (excluding mic)
Weight	800 g - PM 1060 / 850 g - PM1120

Packing Information

Carton size : 525 (L) x 270 (W) x 85 (H) mm
 Gross weight : PM1060 : 1.15 kg
 PM1120 : 1.20 kg
 1 unit per carton

